

PATHpix™ XL

*Macro Imaging for
Anatomical Pathology*

PATHpix™ hardware

- Internal Mounting
- High-Res Scientific Camera
- Motorized Zoom Lens
- Barcode & Foot Controls

Lab Owl™ software

- Touch-Screen Interface
- Graphical Annotations
- LIS Integration
- Remote Screencasting

Grossing station integrated mounting



- ✓ Stable Optical Alignment
- ✓ Efficient Workflow
- ✓ Durable Imaging Solution



virtusimaging.com

Scientific-Grade Imaging System

- Grossing station integrated mounting for stability and durability
- Flush profile keeps the imaging head out of your way while you work
- Color 6 MP scientific camera, 2752 x 2192 pixel resolution
- CCD image sensor with global electronic shutter, 4.54 x 4.54 μm cells
- Automatic and manually adjustable exposure, gain, white balance
- Optimized optics and system geometry for high depth-of-field subjects
- 16x motorized zoom lens with optional hands-free foot pedal
- Up to 10 configurable preset zoom levels with on-screen preview
- Motorized focus adjustment for fine-tuned focal plane control
- LED lighting options to reduce reflection and shadow

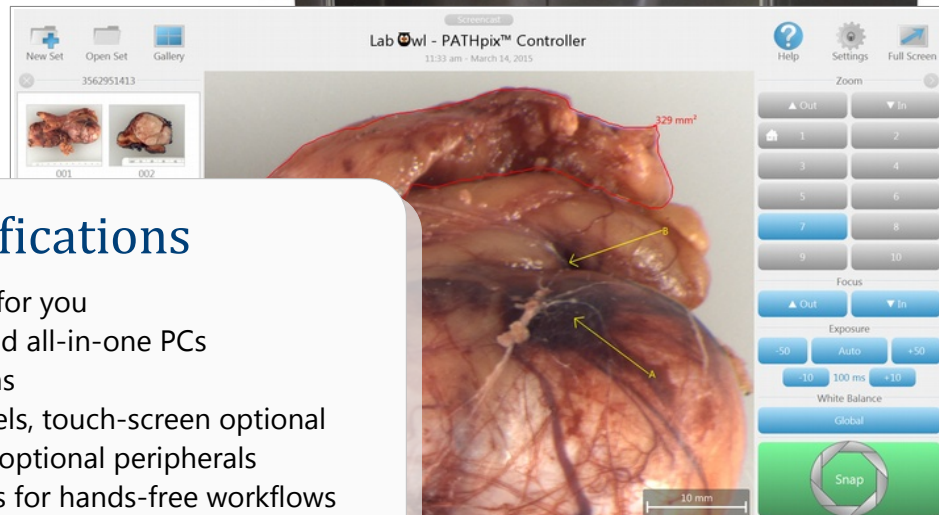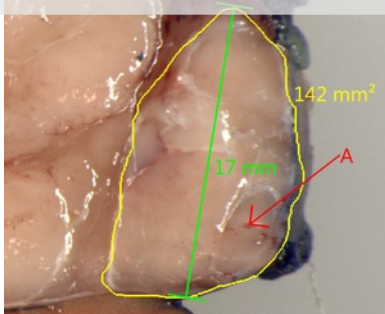

Computer Specifications

- Bring your own PC or let us configure one for you
- Multiple mounting options for monitors and all-in-one PCs
- Windows® 7 or 10, 64-bit operating systems
- Full HD display resolution, 1920 x 1080 pixels, touch-screen optional
- USB 3 connections for camera, lenses, and optional peripherals
- Optional barcode readers and foot controls for hands-free workflows
- TWAIN connection optional for integration with LIS, PACS, etc.
- Remote Screencasting to any web browser without additional software

PATHpix™ XL
*Streamlined Imaging
in a Snap*

Contact

Contact us today to learn more and to schedule a demonstration of the PATHpix™ system in action.

Phone: (844) 484-7887
Email: info@virtusimaging.com
Web: virtusimaging.com