




**8.00" 7/8 Lobes 5.0**

MECHANICAL PERFORMANCE		
Max. Weight on Bit	105,000 lbs	467 kN
Max. Pull to Re-Run	360,000 lbs	1,601 kN
Pull to Yield	875,000 lbs	3,892 kN
Bit to Bend (ABH)	84.9 in	2,156 mm
Bit to Bend (FBH)	71.9 in	1,825 mm
Weight	3,150 lbs	1,428 kg
Length	26.6 ft	8.1 m
Top Connection (Box)	6 5/8" Reg	
Bit Connection (Box)	6 5/8" Reg	

FBH SETTING	SLICK HOUSING			STABILIZED HOUSING		
	HOLE SIZE			1/8" UNDERGAGE HOLE SIZE		
DEG	9-7/8"	10 5/8"	12 1/4"	9-7/8"	10 5/8"	12 1/4"
0.25	1.57	0.71	0.16	2.29	3.38	4.76
0.50	3.15	1.89	0.94	3.87	4.96	6.34
0.75	4.72	3.31	2.36	5.44	6.53	7.91
1.00	6.30	4.28	3.46	7.02	8.11	9.49
1.25	7.87	5.51	4.33	8.59	9.68	11.06
1.50	9.45	6.61	5.29	10.17	11.26	12.64
1.75	11.02	7.72	6.61	11.74	12.83	14.21
2.00	12.60	10.08	7.56	13.32	14.41	15.79
2.25	14.17	11.62	9.21	14.89	15.98	17.36
2.50	15.75	12.91	11.34	16.47	17.56	18.94
2.75	17.32	14.21	12.47	18.04	19.13	20.51
3.00	18.90	15.50	13.61	19.62	20.71	22.09

POWER SECTION PERFORMANCE SPECIFICATIONS		
Torque Slope	9.77 ft-lb/psi	1.92 Nm/kPa
Flow Range	396 - 634 GPM	1,500-2,400 LPM
Rotation	0.257 Rev/Gal	
Speed Range	102-163 RPM	
Off Bottom Press	126 psi	870 kPa

	POWER SECTION PERFORMANCE DETAILS	
	PREM RUBBER	HARD RUBBER
Max Diff Press psi (kPa)	870 (6,000)	1,087 (7,500)
Max Torque ft-lb (Nm)	8,500 (11,520)	10,620 (14,400)
Stall Diff Press psi (kPa)	1,305(9,000)	1,631 (11,250)
Stall Torque ft-lb (Nm)	12,750 (17,280)	15,940 (21,600)
Max Recommended HP (kW)	263 (197)	328 (246)

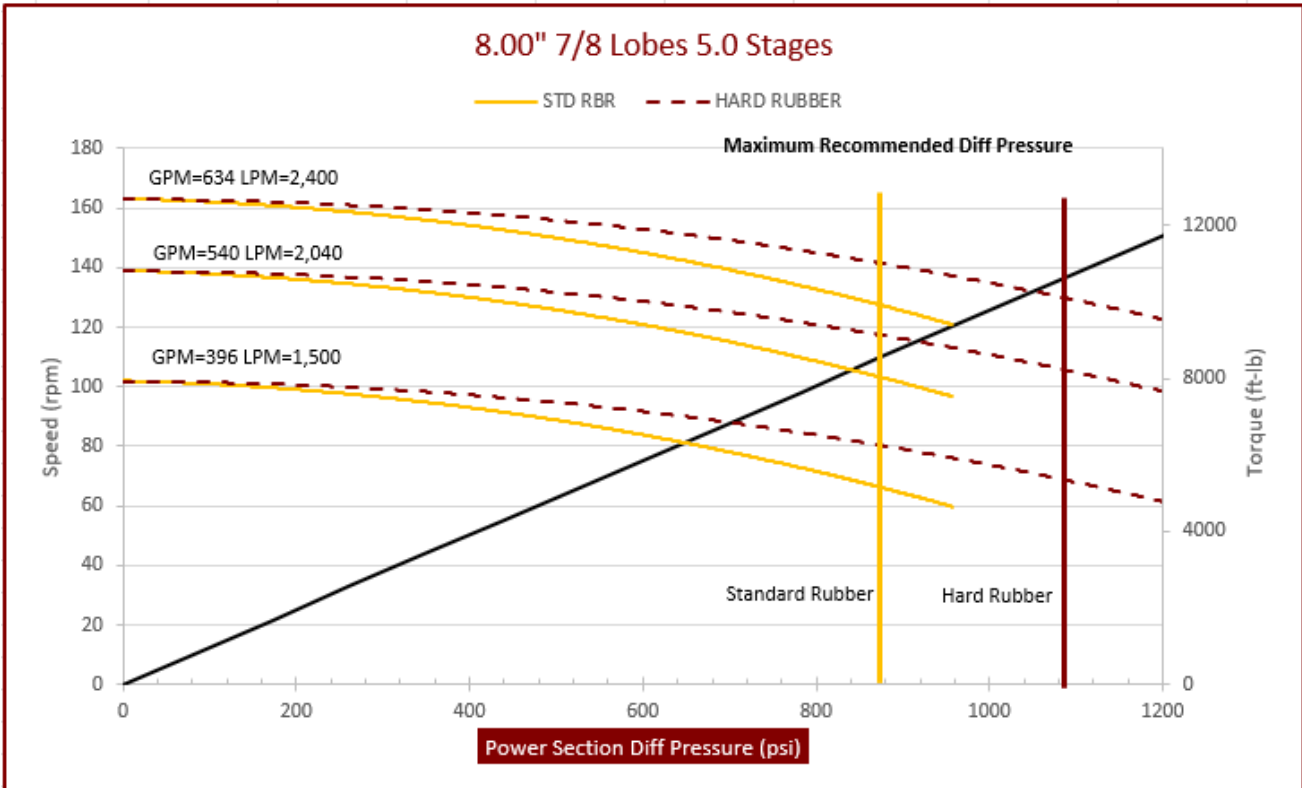

Operating a power section above the maximum recommended differential pressure will reduce stator life. Performance curves are for reference only. Actual power section performance may vary depending on the down hole temperature and rotor/stator fit. Performance data are subject to change without notice.