

**MECHANICAL PERFORMANCE**

Max. Weight on Bit	50,000 lbs	222 kN
Max. Pull to Re-Run	100,000 lbs	445 kN
Pull to Yield	300,000 lbs	1,334 kN
Bit to Bend (ABH)	62.4 in	1,584 mm
Bit to Bend (FBH)	52.9 in	1,344 mm
Weight	815 lbs	370 kg
Length	20.6 ft	6.3 m
Top Connection (Box)	3 1/2" IF	
Bit Connection (Box)	3 1/2" Reg	


FBH SETTING	SLICK HOUSING			STABILIZED HOUSING		
	HOLE SIZE			1/8" UNDERGAGE HOLE SIZE		
DEG	6"	6 1/8"	6 3/4"	6"	6 1/8"	6 3/4"
0.25	2.02	0.91	0.20	3.29	3.43	4.17
0.50	4.05	2.43	1.21	5.31	5.45	6.20
0.75	6.07	4.25	3.04	7.33	7.47	8.22
1.00	8.09	5.50	4.45	9.36	9.50	10.24
1.25	10.12	7.08	5.57	11.38	11.52	12.27
1.50	12.14	8.50	6.80	13.40	13.54	14.29
1.75	14.17	9.92	8.50	15.43	15.57	16.31
2.00	16.19	12.95	9.71	17.45	17.59	18.34
2.25	18.21	14.94	11.84	19.47	19.62	20.36
2.50	20.24	16.59	14.57	21.50	21.64	22.39
2.75	22.26	18.25	16.03	23.52	23.66	24.41
3.00	24.29	19.91	17.49	25.55	25.69	26.43

**POWER SECTION PERFORMANCE SPECIFICATIONS**

Torque Slope	3.1 ft-lb/psi	0.606 Nm/kPa
Flow Range	159 - 285 GPM	600 - 1,080 LPM
Rotation	0.796 Rev/Gal	
Speed Range	126-227 RPM	
Off Bottom Press	110 psi	755 kPa

**POWER SECTION PERFORMANCE DETAILS**

	PREM RUBBER	HARD RUBBER
Max Diff Press psi (kPa)	783 (5,400)	978 (6,750)
Max Torque ft-lb (Nm)	2,416 (3,274)	3,020 (4,092)
Stall Diff Press psi (kPa)	1,174 (8,100)	1,468 (10,125)
Stall Torque ft-lb (Nm)	3,624 (4,911)	4,530 (6,138)
Max Recommended HP (kW)	104 (78)	130 (97)

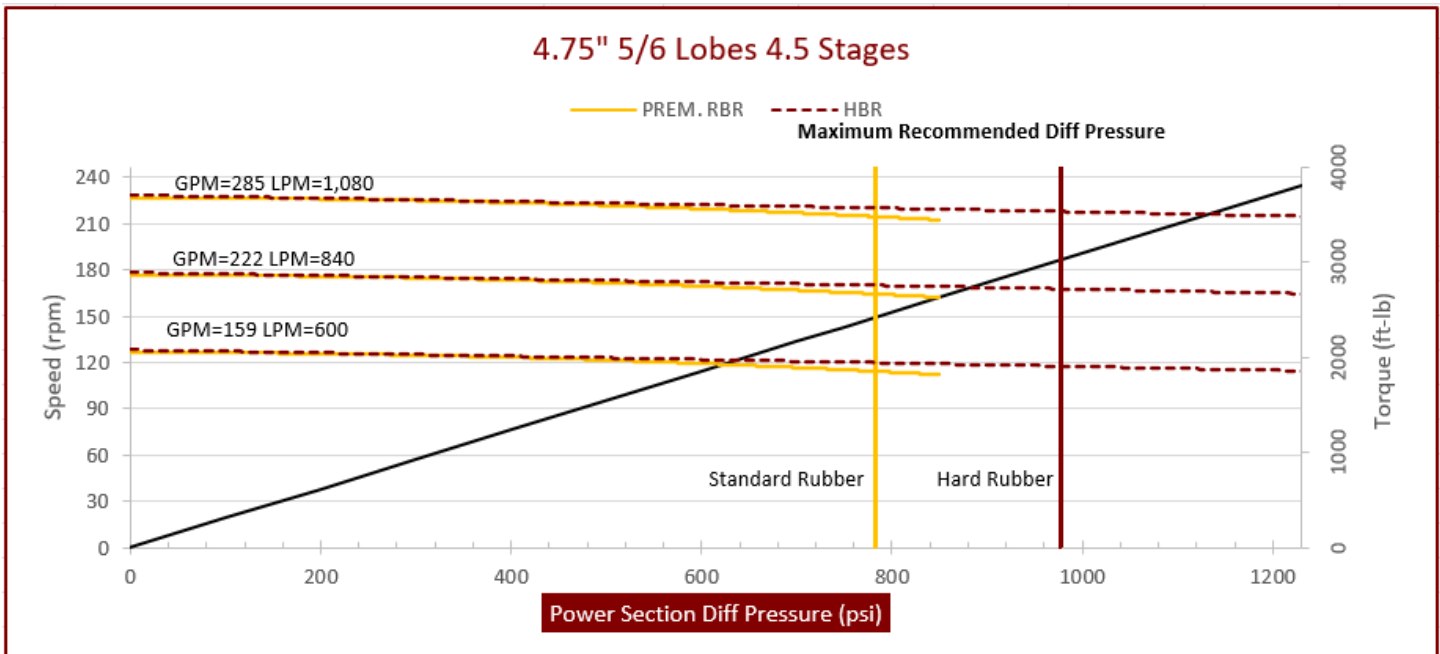

Operating a power section above the maximum recommended differential pressure will reduce stator life. Performance curves are for reference only. Actual power section performance may vary depending on the down hole temperature and rotor/stator fit. Performance data are subject to change without notice.