

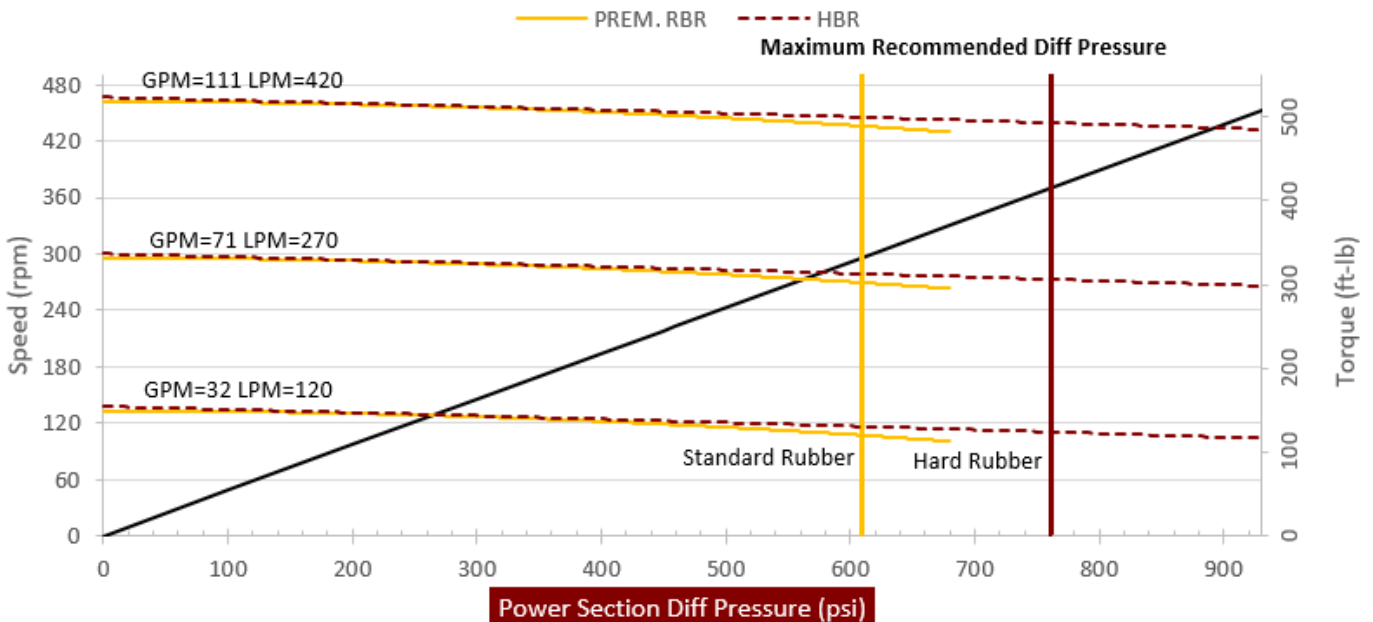
MECHANICAL PERFORMANCE

Max. Weight on Bit	3,500 lbs	15.5 kN
Max. Pull to Re-Run	20,000 lbs	89 kN
Pull to Yield	50,000 lbs	227 kN
Bit to Bend (ABH)	/	/
Bit to Bend (FBH)	/	/
Weight	154 lbs	70 kg
Length	13.8 ft	4.22 m
Top Connection (Box)	1 1/2" Reg	
Bit Connection (Box)	1 1/2" Reg	

POWER SECTION PERFORMANCE SPECIFICATIONS
POWER SECTION PERFORMANCE DETAILS

PREM RUBBER HARD RUBBER

Torque Slope	0.5 ft-lb/psi 0.107 Nm/kPa	Max Diff Press psi (kPa)	609 (4,200)	761 (5,250)
Flow Range	32 - 111 GPM 120- 420 LPM	Max Torque ft-lb (Nm)	332 (450)	415 (562)
Rotation	4.16 Rev/Gal	Stall Diff Press psi (kPa)	913 (6,300)	1,141 (7,875)
Speed Range	132-462 RPM	Stall Torque ft-lb (Nm)	498 (675)	622 (843)
Off Bottom Press	565 psi 3,900 kPa	Max Recommended HP (kW)	29 (22)	36 (27)

2.375" 7/8 Lobes 3.5 Stages


Operating a power section above the maximum recommended differential pressure will reduce stator life. Performance curves are for reference only. Actual power section performance may vary depending on the down hole temperature and rotor/stator fit. Performance data are subject to change without notice.