

MECHANICAL PERFORMANCE

Max. Weight on Bit	20,000 lbs	89 kN
Max. Pull to Re-Run	60,000 lbs	267 kN
Pull to Yield	172,000 lbs	765 kN
Bit to Bend (ABH)	36 in	914 mm
Bit to Bend (FBH)	29 in	736 mm
Weight	262 lbs	119 kg
Length	10.4 ft	3.2 m
Top Connection (Box)	2 7/8" Reg	
Bit Connection (Box)	2 3/8" Reg	


FBH SETTING	SLICK HOUSING			STABILIZED HOUSING 1/8" UNDERGAGE		
	HOLE SIZE			HOLE SIZE		
DEG	4 1/2"	5 1/2"	6"	4 1/2"	5 1/2"	6"
0.25	2.84	1.28	0.28	6.63	11.13	13.47
0.50	6.76	4.06	2.03	10.55	15.05	17.40
0.75	10.69	7.48	5.34	14.47	18.98	21.32
1.00	14.61	9.93	8.03	18.39	22.90	25.24
1.25	18.53	12.97	10.19	22.31	26.82	29.16
1.50	22.45	15.72	12.57	26.24	30.74	33.08
1.75	26.37	18.46	15.82	30.16	34.66	37.01
2.00	30.30	24.24	18.18	34.08	38.59	40.93
2.25	34.22	28.06	22.24	38.00	42.51	44.85
2.50	38.14	31.28	27.46	41.93	46.43	48.77
2.75	42.06	34.49	30.29	45.85	50.35	52.70
3.00	45.99	37.71	33.11	49.77	54.28	56.62

POWER SECTION PERFORMANCE SPECIFICATIONS

Torque Slope	1.1 ft-lb/psi	0.217 Nm/kPa
Flow Range	48 - 159 GPM	180- 600 LPM
Rotation	2.465 Rev/Gal	
Speed Range	118-392 RPM	
Off Bottom Press	725 psi	5,400 kPa

POWER SECTION PERFORMANCE DETAILS

	PREM RUBBER	HARD RUBBER
Max Diff Press psi (kPa)	522 (3,600)	652 (4,500)
Max Torque ft-lb (Nm)	575 (780)	720 (975)
Stall Diff Press psi (kPa)	783 (5,400)	978 (6,750)
Stall Torque ft-lb (Nm)	863 (1,170)	1,079 (1,462)
Max Recommended HP (kW)	43 (32)	53 (40)

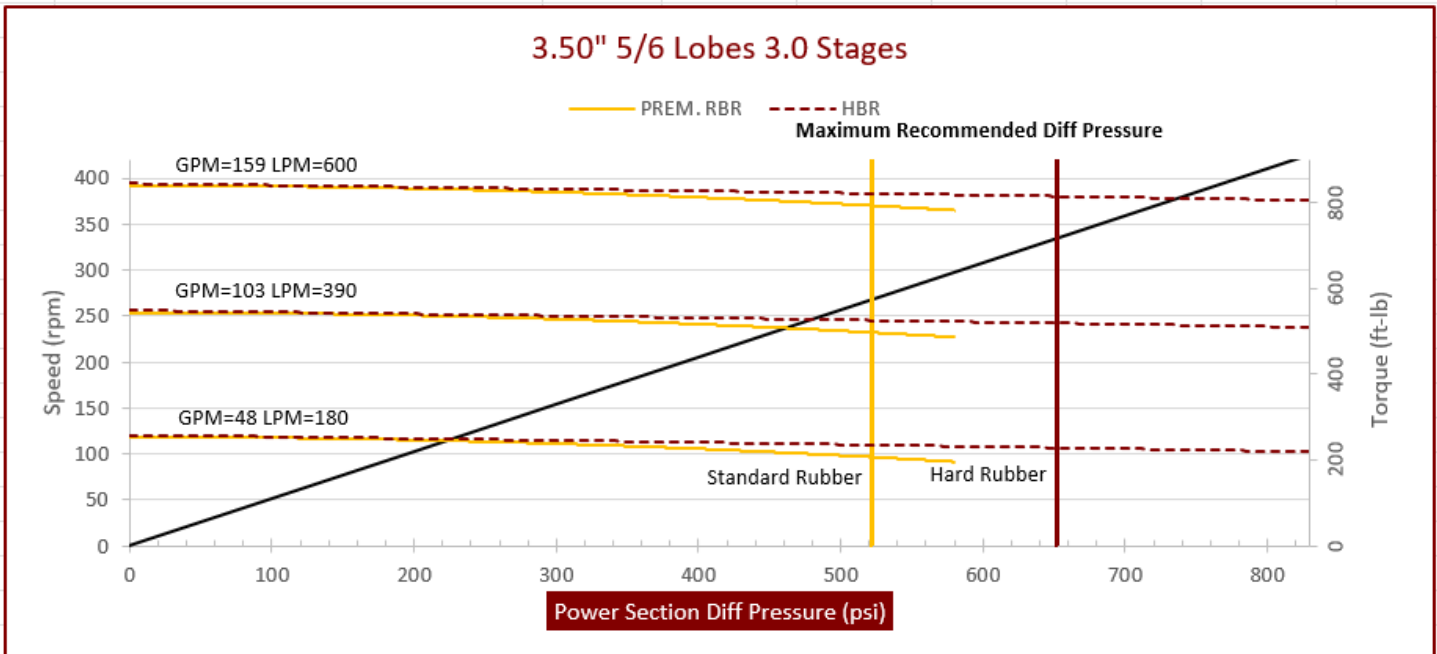

Operating a power section above the maximum recommended differential pressure will reduce stator life. Performance curves are for reference only. Actual power section performance may vary depending on the down hole temperature and rotor/stator fit. Performance data are subject to change without notice.