



# 8.75" 7/8 Lobes 9.4 Stages

## MECHANICAL PERFORMANCE

Max. Weight on Bit	120,000 lbs	534 kN
Max. Pull to Re-Run	495,000 lbs	2,201 kN
Pull to Yield	1,000,000 lbs	4,448 kN
Bit to Bend (ABH)	--	--
Bit to Bend (FBH)	64.7 in	1,643 mm
Weight	5,118 lbs	2,322 kg
Length	37.89 ft	11.55m
Top Connection (Box)	6 5/8" Reg	
Bit Connection (Box)	6 5/8" Reg	


FBH SETTING	SLICK HOUSING			STABILIZED HOUSING 1/8" UNDERGAGE		
	HOLE SIZE			HOLE SIZE		
DEG	11-3/4"	12 1/4"	14 3/4"	11-3/4"	12 1/4"	14 3/4"
0.25	0.49	0.29	0.11	2.20	2.37	3.06
0.50	1.74	1.54	0.58	3.39	3.56	4.25
0.75	2.98	2.79	1.83	4.58	4.76	5.44
1.00	4.23	4.03	3.08	5.77	5.95	6.63
1.25	5.48	5.28	4.33	6.96	7.14	7.82
1.50	6.73	6.53	5.57	8.15	8.33	9.01
1.75	7.97	7.78	6.82	9.34	9.52	10.20
2.00	9.22	9.02	8.07	10.53	10.71	11.40
2.25	10.47	10.27	9.32	11.72	11.90	12.59
2.50	11.72	11.52	10.56	12.91	13.09	13.78
2.75	12.96	12.77	11.81	14.10	14.28	14.97
3.00	14.21	14.01	13.06	15.29	16.27	17.23

## POWER SECTION PERFORMANCE SPECIFICATIONS

Torque Slope	14.4 ft-lb/psi	
Flow Range	550 - 1150 GPM	2,082-4,353 LPM
Rotation	0.17 Rev/Gal	
Speed Range	94-196 RPM	
Off Bottom Press	165 psi	1,138 kPa

## POWER SECTION PERFORMANCE DETAILS

	PREM RUBBER	HARD RUBBER
Max Diff Press psi (kPa)	1,636 (11,280)	2,181 (15,040)
Max Torque ft-lb (Nm)	23,549 (31,929)	31,399 (42,572)
Stall Diff Press psi (kPa)	2,454 (16,920)	3,271 (22,560)
Stall Torque ft-lb (Nm)	35,324 (47,893)	47,098 (63,858)
Max Recommended HP (kW)	642 (480)	872 (650)

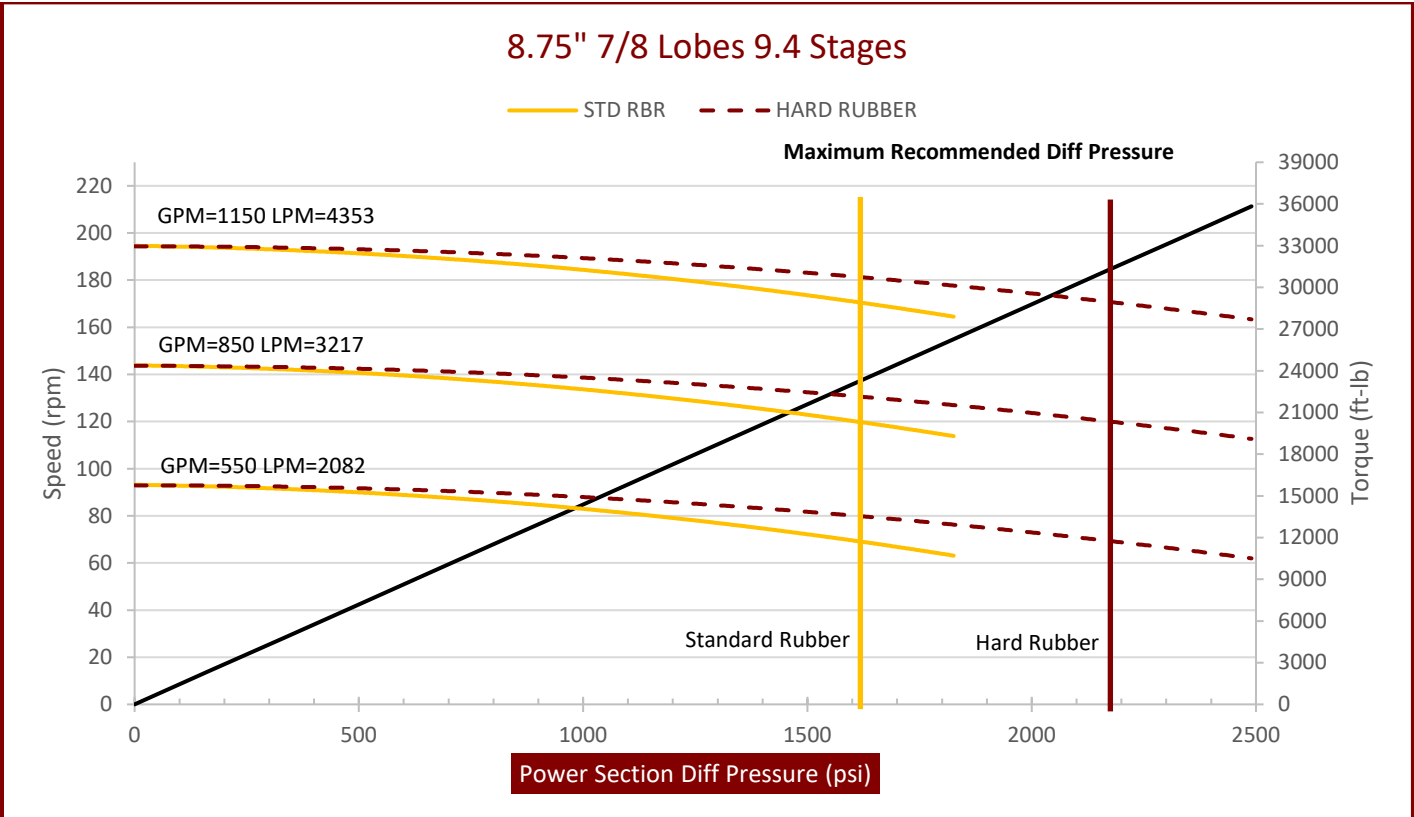

Operating a power section above the maximum recommended differential pressure will reduce stator life. Performance curves are for reference only. Actual power section performance may vary depending on the down hole temperature and rotor/stator fit. Performance data are subject to change without notice.