



9.00" 5/6 Lobes 6.0 Stages

MECHANICAL PERFORMANCE

Max. Weight on Bit	120,000 lbs	534 kN
Max. Pull to Re-Run	495,000 lbs	2,201 kN
Pull to Yield	1,000,000 lbs	4,448 kN
Bit to Bend (ABH)	--	--
Bit to Bend (FBH)	73 in	1,855 mm
Weight	4,370 lbs	1,983 kg
Length	28.31 ft	8.63m
Top Connection (Box)	6 5/8" Reg	
Bit Connection (Box)	6 5/8" Reg	


FBH SETTING	SLICK HOUSING			STABILIZED HOUSING		
	HOLE SIZE			1/8" UNDERGAGE		
	11-3/4"	12 1/4"	14 3/4"	11-3/4"	12 1/4"	14 3/4"
DEG						
0.25	1.49	0.67	0.15	3.18	3.51	5.10
0.50	2.98	1.79	0.90	4.68	5.00	6.59
0.75	4.48	3.13	2.24	6.17	6.50	8.09
1.00	5.97	4.06	3.28	7.66	7.99	9.58
1.25	7.46	5.22	4.10	9.15	9.48	11.07
1.50	8.95	6.27	5.01	10.65	10.97	12.56
1.75	10.45	7.31	6.27	12.14	12.47	14.06
2.00	11.94	9.55	7.16	13.63	13.96	15.55
2.25	13.43	11.01	8.73	15.12	15.45	17.04
2.50	14.92	12.24	10.75	16.62	16.94	18.53
2.75	16.42	13.46	11.82	18.11	18.44	20.03
3.00	17.91	14.69	12.89	19.60	19.93	21.52

POWER SECTION PERFORMANCE SPECIFICATIONS

Torque Slope	10.81 ft-lb/psi	2.12 Nm/kPa
Flow Range	317 - 634 GPM	1,200-2,400 LPM
Rotation	0.229 Rev/Gal	
Speed Range	72-145 RPM	
Off Bottom Press	140 psi	964 kPa

POWER SECTION PERFORMANCE DETAILS

	PREM RUBBER	HARD RUBBER
Max Diff Press psi (kPa)	1,044 (7,200)	1,305 (9,000)
Max Torque ft-lb (Nm)	11,285(15,290)	14,105 (19,112)
Stall Diff Press psi (kPa)	1,566(10,800)	1,957 (13,500)
Stall Torque ft-lb (Nm)	16,929 (22,935)	21,158 (28,668)
Max Recommended HP (kW)	307(230)	384 (287)

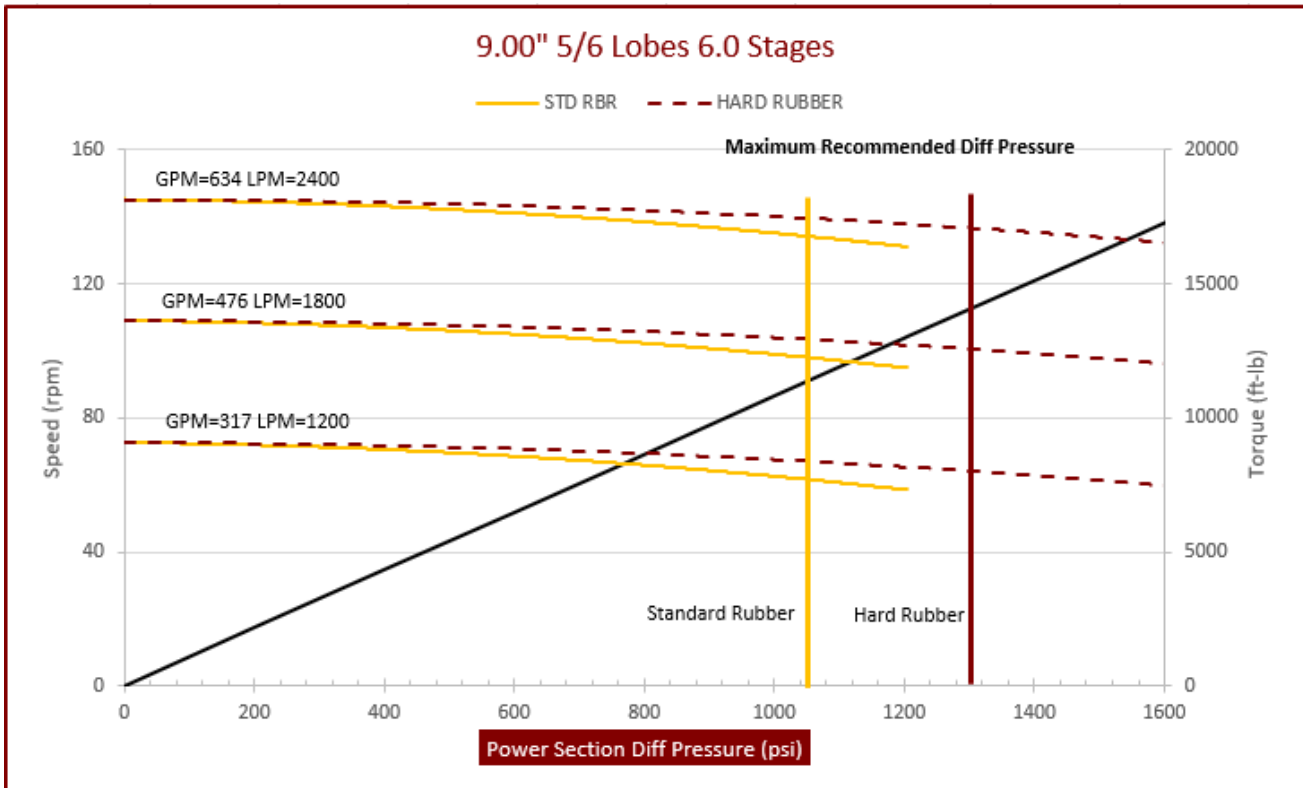

Operating a power section above the maximum recommended differential pressure will reduce stator life. Performance curves are for reference only. Actual power section performance may vary depending on the down hole temperature and rotor/stator fit. Performance data are subject to change without notice.