



8.00" 7/8 Lobes 3.4 Stages Combo (9-5/8" Lower End)

MECHANICAL PERFORMANCE

Max. Weight on Bit	120,000 lbs	534 kN
Max. Pull to Re-Run	495,000 lbs	2,201 kN
Pull to Yield	1,000,000 lbs	4,448 kN
Bit to Bend (ABH)	90 in	2,284 mm
Bit to Bend (FBH)	72 in	1,829 mm
Weight	4,438 lb	2,013 kg
Length	35.3 ft	10.76 m
Top Connection (Box)	6 5/8" Reg; 7 5/8" Reg	
Bit Connection (Box)	6 5/8" Reg; 7 5/8" Reg	


ABH SETTING	SLICK HOUSING			STABILIZED HOUSING		
	HOLE SIZE			1/8" UNDERGAGE		
DEG	9 7/8"	10 5/8"	12 1/4"	9 7/8"	10 5/8"	12 1/4"
0.39	2.45	2.45	2.45	3.74	4.84	6.06
0.78	4.18	4.00	4.00	5.60	6.69	7.91
1.15	5.83	4.38	4.24	7.36	8.46	9.68
1.50	7.39	5.80	4.77	9.03	10.13	11.35
1.83	8.86	7.38	5.38	10.61	11.71	12.93
2.12	10.14	8.83	5.99	12.00	13.09	14.31
2.38	11.30	10.03	7.18	13.23	14.33	15.54
2.60	12.28	10.94	8.15	14.29	15.38	16.60
2.77	13.04	11.72	8.97	15.10	16.19	17.41
2.89	13.57	12.26	9.54	15.67	16.76	17.98
2.97	13.93	12.62	9.91	16.05	17.15	18.36
3.00	14.06	12.76	10.06	16.19	17.29	18.51

POWER SECTION PERFORMANCE SPECIFICATIONS

Torque Slope	28.04 ft-lb/psi	5.514 Nm/kPa
Flow Range	400 - 900 GPM	1,514-3,406 LPM
Rotation	0.089 Rev/Gal	
Speed Range	36-80 RPM	
Off Bottom Press	150 psi	1,034 kPa

POWER SECTION PERFORMANCE DETAILS

	HARD RUBBER
Max Diff Press psi (kPa)	770 (5,309)
Max Torque ft-lb (Nm)	21,450 (29,082)
Stall Diff Press psi (kPa)	1,150 (7,929)
Stall Torque ft-lb (Nm)	32,180 (43,630)
Max Recommended HP (kW)	288 (215)

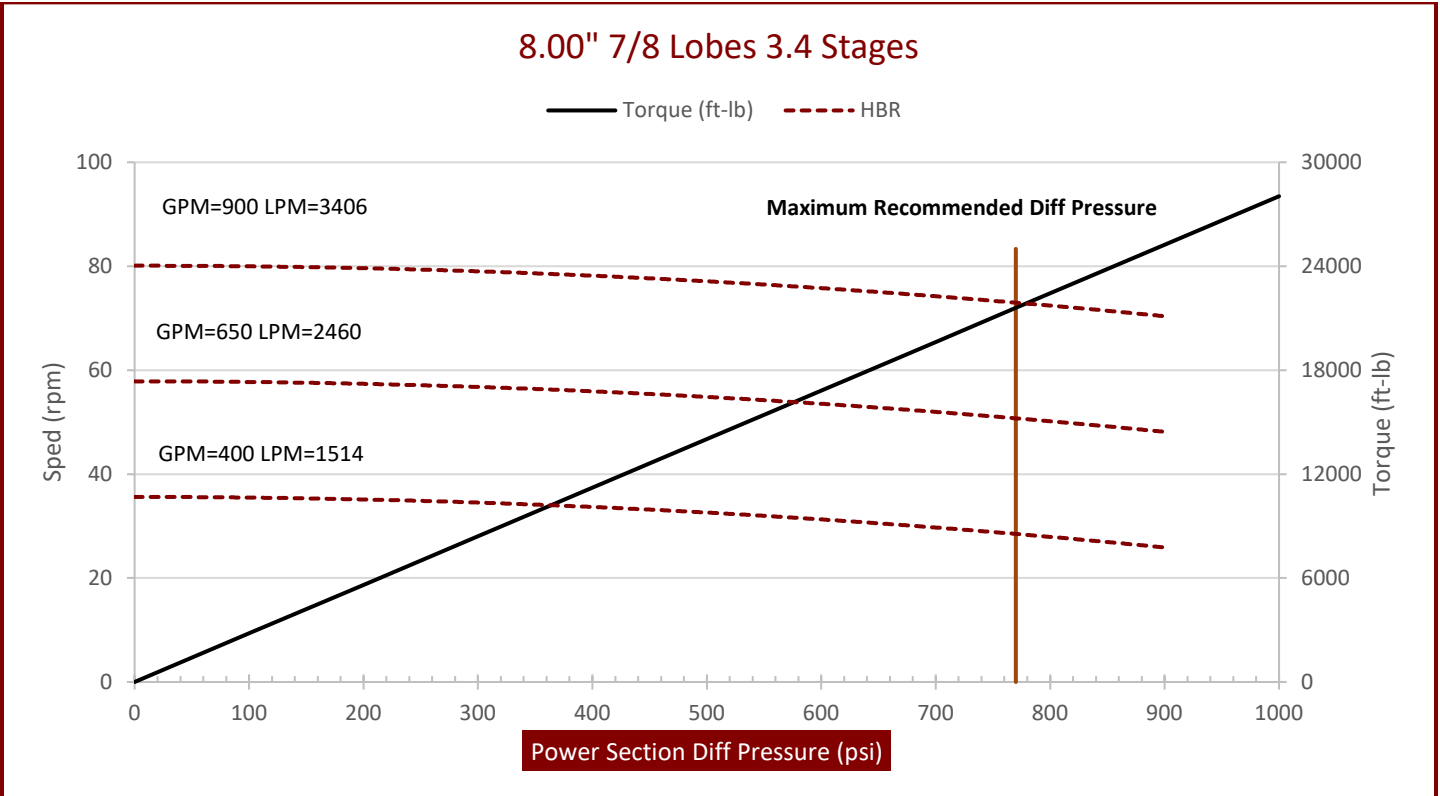

Operating a power section above the maximum recommended differential pressure will reduce stator life. Performance curves are for reference only. Actual power section performance may vary depending on the down hole temperature and rotor/stator fit. Performance data are subject to change without notice.